




ARMOR-STONE™ FLOORING

When floors are rough or require an extremely tough-wearing high build, fast set overlay, then ARMOR-STONE™ meets the objective. Applied from 1/8th inch to 5/16th inch in most applications to form an extremely tough epoxy mortar overlay that has high impact and chemical resistance. One step trowel applied mortar levels rough surfaces. A wide range of colors are available. A multitude of topcoats are optional to produce the desired surface. Cove, slope or overlay. Use to patch and level before other VSC epoxy overlay systems.



PLANT FLOOR

WASH BAY

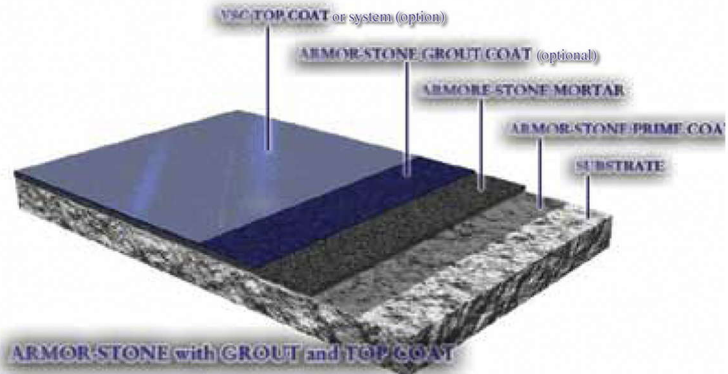

USES

- Heavy Manufacturing
- Food Processing
- Truck Wash Bays
- Dairy Floors
- Service Centers


ARMOR-STONE™ works as a hand trowel system over smaller surfaces or a power trowel system over large areas. ARMOR-STONE™ with ES Natural forms an ideal cove base. ARMOR-STONE™ is fast setting with a 4 - 5 hour set.



POWER TROWEL



HAND TROWEL

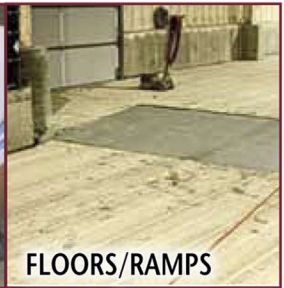

FLOORS/RAMPS

ARMOR-STONE™ EPOXY LIQUIDS

#82801-AB5 Gal Kit

AGGREGATE VSC BLENDS (ADMIXES)

ES NATURAL #82801-35N 35 lb. bag
G DIAMOND #82900-35N 35 lb. bag

- TO COLOR ARMOR-STONE USE 8 FL. OZ. OF SELECTED COLOR ADDITIVE per BATCH

ARMOR-STONE™ SYSTEM PROCESS

- STEP 1:** Prime prepared substrate with ARMOR-STONE™ epoxy resins at 75-100 sq. ft. per .5 gallon unit.
- STEP 2:** Base Batch: Mix .5 gallon ARMOR-STONE EPOXY resins with PROP MIXER (see page 20). Add 8 fl. oz. color additive if used. ADD liquid to PAIL MIXER (see page 20) and then thoroughly mix in 35 lbs selected aggregate blend.
- STEP 3:** Spread mortar with gage or screed rake or trowel over wet primer and then hand-trowel (see page 22) or power-trowel to desired thickness. TYPICAL COVERAGE: 18 sq. ft. per batch at 1/4-inch nominal thickness. Leave as is for a light non-slip finish or top coat (see steps 4 and 5) for desired finish.
- STEP 4:** Apply ARMORCOAT EPOXY (see page 4) grout coat with flat squeegee (see page 22) and roller (see page 21) at the rate of 50-75 sq. ft. per gallon to seal the surface.
- STEP 5:** Apply ARMORCOAT, ARMOR-ROCK or ARMOR-ROCK THX systems to obtain the desired surface texture.



Instalaciones de Alta Tecnología

www.sumainternacional.com

Guadalajara:
Volcán Parícutín 6522,
Col. El Colli Urbabo
Guadalajara, 45070, Jal
Tel. 52(33)3627-4585

Mérida:
Calle 80 533,
Col. Dzununcan
Mérida, 97315, Yuc.
Tel. 52(999) 252-9473

Hermosillo:
Cda. De la Plata 117
Col. Valle Bonito
Hermosillo, 82246, Son
Tel. 52(662) 311-5343

ventas@sumainternacional.com